




Worldwide repairs carried out with PolymerMetal®

REP-# 136

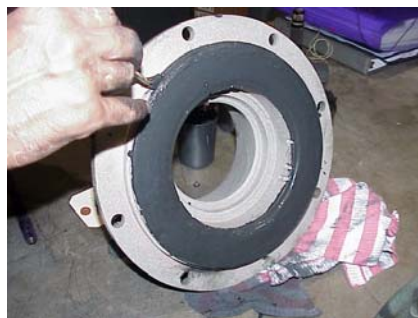

A worn pump casing was coated with Ceramium liquid. Depending on the application consistency, Ceramium can be applied with a brush, a spatula or any other suitable tool or by pouring or injecting. Before coating, the surface must be roughened e.g. by sand blasting and then cleaned with MM-Degreaser Z or Acetone.

MultiMetal
the MetalExistenceCompany®